

LVT

- > DOMINO 2.0
- > PLANK-IT
- > IDEAL
- > ROBUST

GRABO

Luxury vinyl tile

DOMINO 2.0 | PLANKIT | IDEAL | ROBUST

LUXURY VINYL TILE FLOORING FOR DOMESTIC AND COMMERCIAL USE

The Grabo LVT floorings are inspired by nature, manufactured with phthalate free technology and provides an environmentally friendly flooring solution for the users.

RECOMMENDED USAGE

- > Hospitality
- > Retail
- > Offices
- > Education



iGuard

NORMAL
FORMAT4 SIDE
BEVELED

DOMINO 2.0



PLANK-IT



IDEAL



ROBUST

CONSTRUCTION

iGuard PUR Protective coating


Transparent wear layer

Design printed layer

Middle layer

Glass fibre reinforcement

Back layer

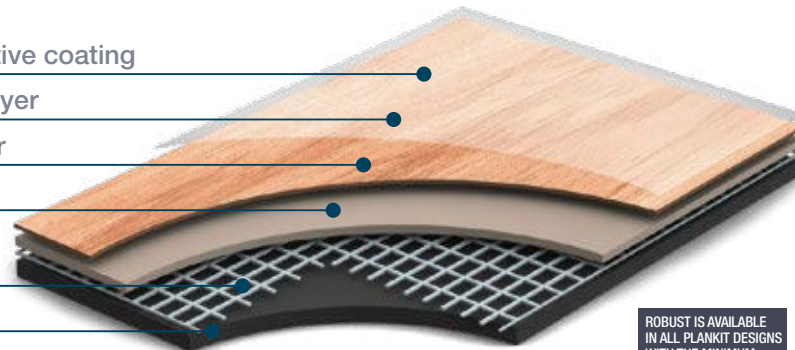

ROBUST IS AVAILABLE
IN ALL PLANKIT DESIGNS
WITH THE MINIMUM
QUANTITY OF
2 PALETTES/DESIGN.

SPECIFICATIONS

DESCRIPTION		Domino 2.0	PlankIT	Ideal	Robust
Construction		Luxury Vinyl Tile with iGuard Surface			
Plank size wood	EN ISO 24346	185x1220 mm	185x1220 mm	185x1220 mm	185x1220 mm
	EN ISO 24346	158x950* mm	158x950* mm	158x950* mm	158x950 mm
Tile size stone	EN ISO 24346	305x610 mm	305x610 mm	305x610 mm	305x610 mm
Total thickness	EN ISO 24346	2,0 mm	2,5 mm	2,7 mm	3,0 mm
Wear layer thickness	EN ISO 24340	0,3 mm	0,55 mm	0,7 mm	1,0 mm
Total weight	EN ISO 23997	3,4 kg/m ²	3,8 kg/m ²	3,9 kg/m ²	4,6 kg/m ²


CLASSIFICATION

European classification	EN 685	class: 23/31	class: 33/42	class: 34/43	class: 34/43
Binder content	EN ISO 10582	Type I.	Type I.	Type I.	Type I.

PERFORMANCE

Abrasion group	EN 660-1	T	T	T	T
Residual indentation	EN ISO 24343	max. 0,1 mm	max. 0,1 mm	max. 0,1 mm	max. 0,1 mm
Dimensional stability	EN ISO 23999	max. 0,15 %	max. 0,15 %	max. 0,15 %	max. 0,15 %
Curling	EN ISO 23999	max. 2,0 mm	max. 2,0 mm	max. 2,0 mm	max. 2,0 mm
Fire resistance	EN 13501-1	class: Bfl-s1	class: Bfl-s1	class: Bfl-s1	class: Bfl-s1
Slip resistance	EN 13893	class: DS	class: DS	class: DS	class: DS
	DIN 51130	class: R10	class: R10	class: R10	class: R10
Electrical properties	EN 1815	max. 2 kV / Antistatic			
Chemical resistance	EN ISO 26987	✓	✓	✓	✓
	ASTM F925	✓	✓	✓	✓
Light fastness	EN 20105 B02	grade 6	grade 6	grade 6	grade 6
Castor chair resistance	EN ISO 4918	✓	✓	✓	✓
Surface treatment		iGuard PUR Surface / Easy cleaning			
Content of pcp	EN 12673	does not contain			
Formaldehyde emission	ENV 717-1	E1 (no emission)			
VOC	EN 12673	pass	pass	pass	pass
4 sides bevelling		–	Available	Available	Available
Warranty	Commercial	5 year	10 year	12 year	15 year
	Residential	10 year	15 year	17 year	20 year

min. order quantity 2 pallets

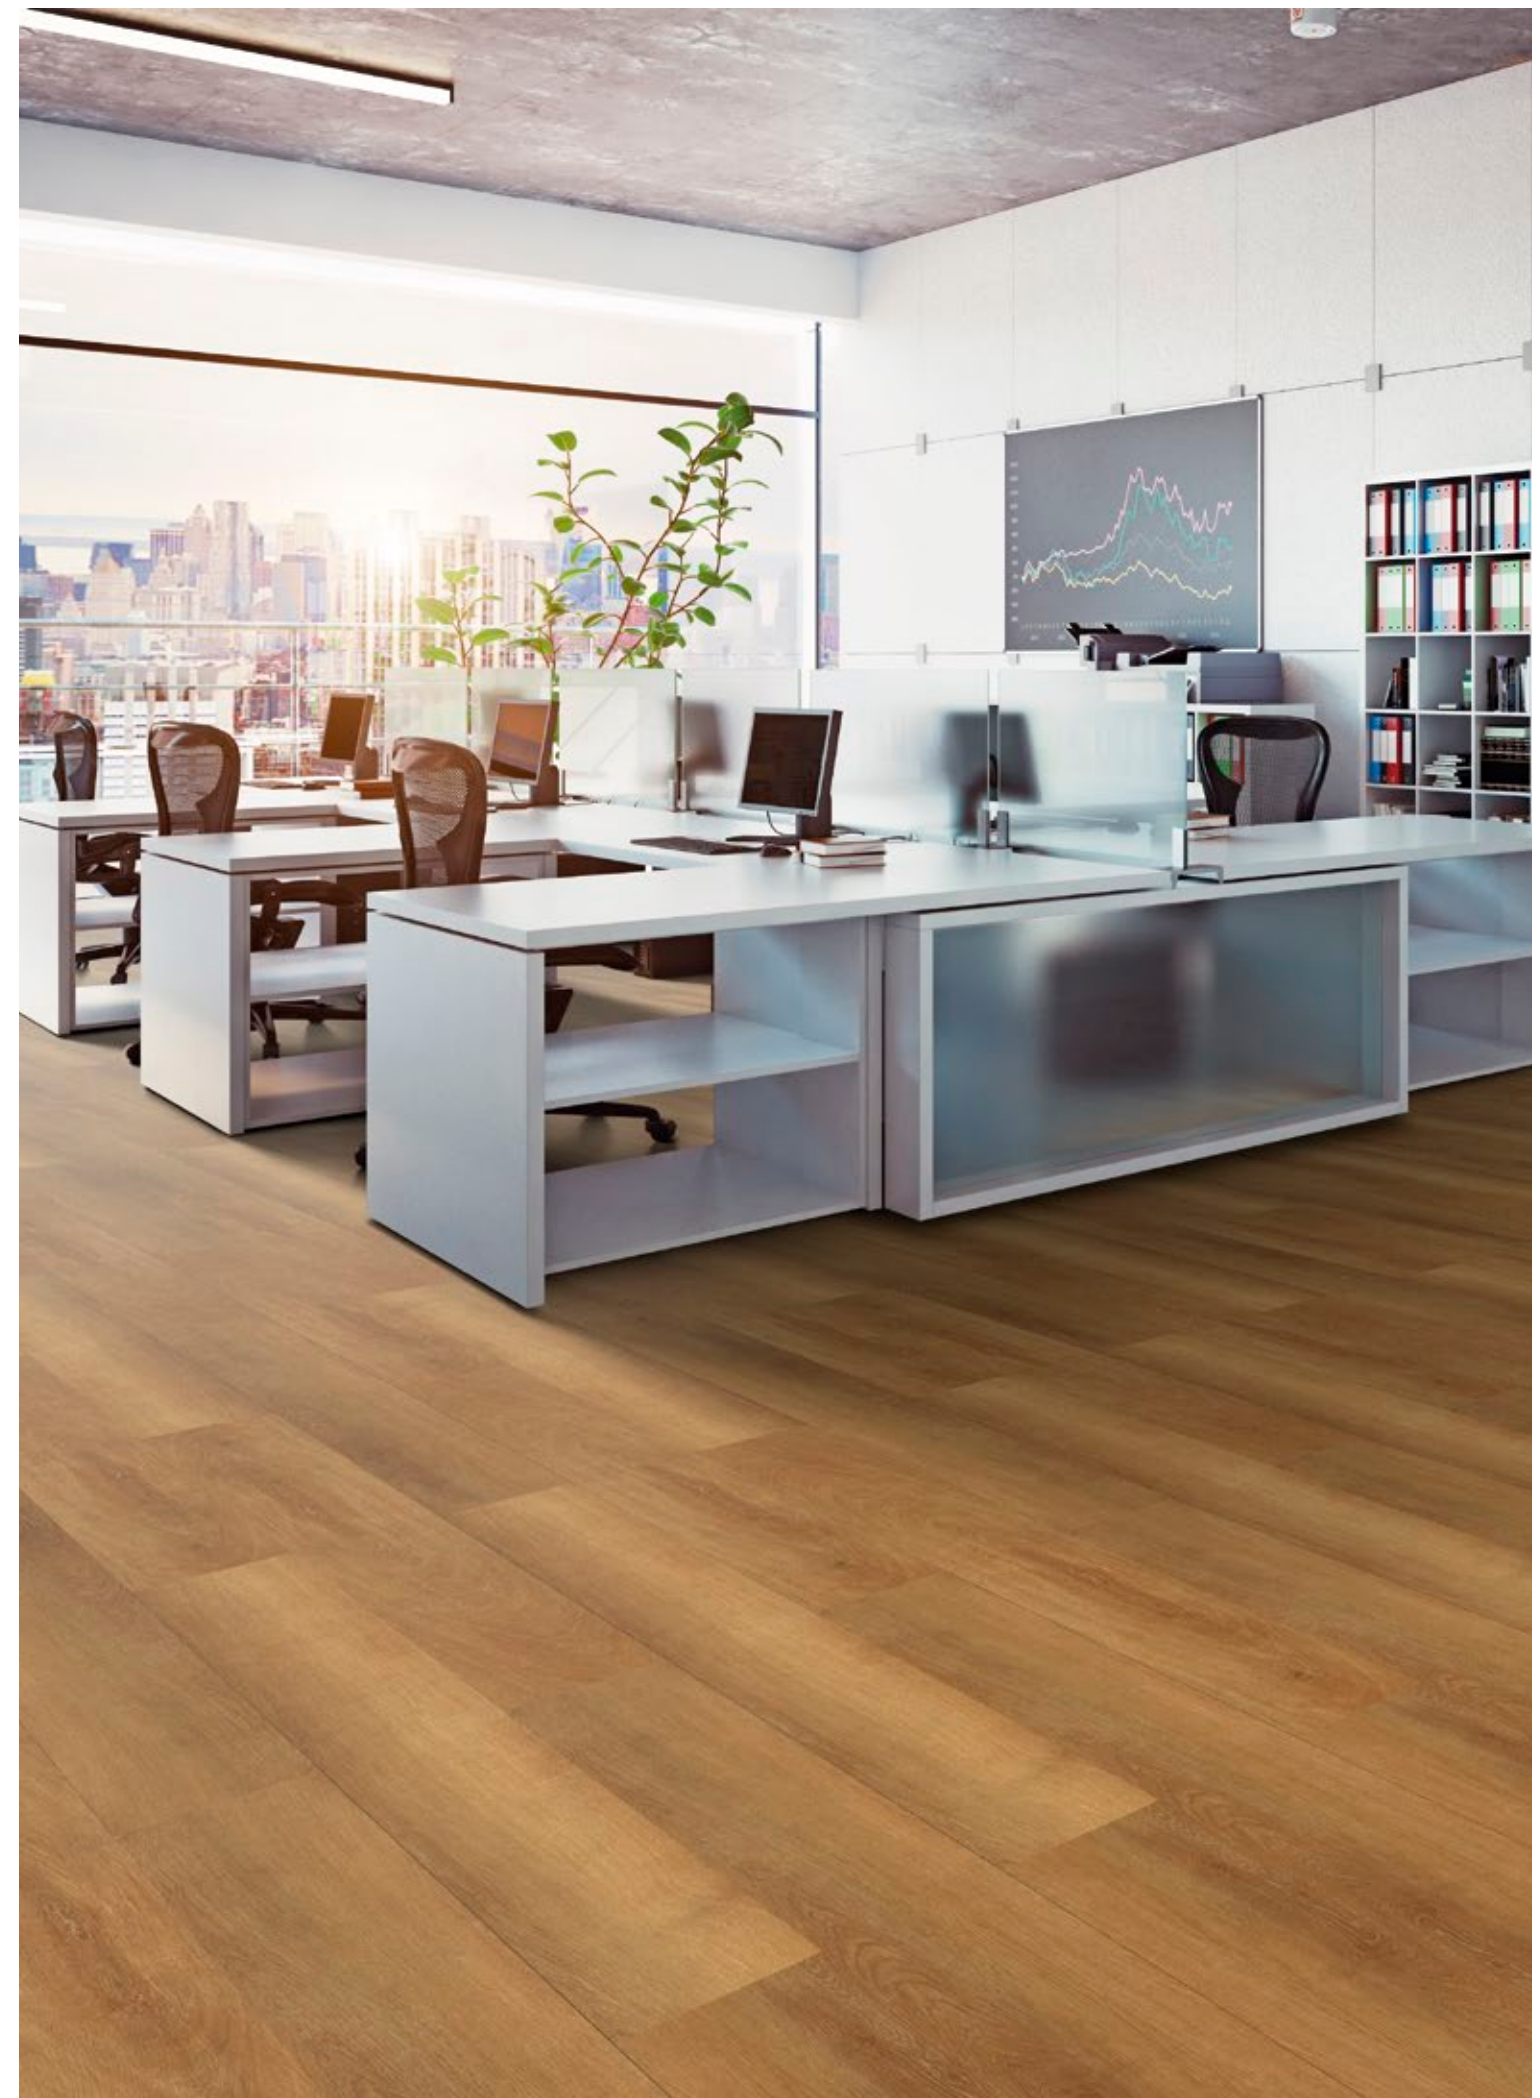

LVT

Wood



100%
WATER
RESISTANT

1 box

12 pcs
~2.7 m²



TARGARYEN | Plank/T |



OLENA | Plank/T |



TYRION | Plank/T |



REED | Plank/T |



BRONN Domino 2.0 | Plank/T | Ideal



LANNISTER Domino 2.0 | Plank/T | Ideal



JOFFREY Domino 2.0 | Plank/T |



MARTELL | Plank/T |



SANSA Domino 2.0 | Plank/T | Ideal



TULLY Domino 2.0 | Plank/T | Ideal



MALISTER | Plank/T |



OBERYN Domino 2.0 | Plank/T | Ideal



DOREAH | Plank/T |



BRANDON | Plank/T |



STARK | Plank/T |



DAVOS Domino 2.0 | Plank/T |



BARATHEON | Plank/T |



ELERIA Domino 2.0 | Plank/T | Ideal

LVT


Wood



100%
WATER
RESISTANT

1 box

12 pcs
~2.7 m²

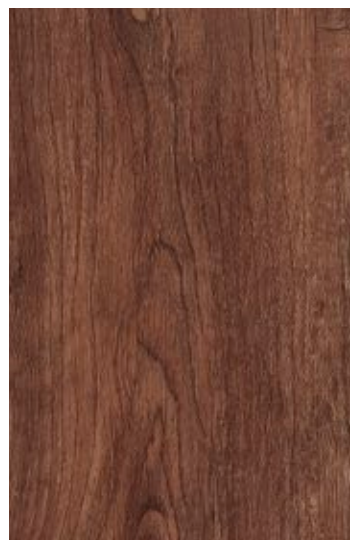

MORMONT

| Plank/T |



DROGO

| Plank/T |



GREYJOY

| Plank/T |



MARGAERY

| Plank/T |



ROSLIN

| Plank/T |



BOLTON Domino 2.0 | Plank/T | Ideal



ARYA

| Plank/T |



WALDER

Domino 2.0 | Plank/T



LVT

Stone



100%
WATER
RESISTANT

1 box

12 pcs
~2.2 m²



PODRICK

| Plank/T |



NYMERIA

| Plank/T |



MYRCELLA

| Plank/T |



HODOR

| Plank/T |



LVT

Stone



100%
WATER
RESISTANT

1 box

12 pcs
~2.2 m²



EURON

| Plank/T |



CASSEL

| Plank/T |



LUWIN

Domino 2.0 | Plank/T | Ideal



ROYCE

Domino 2.0 | Plank/T

